


315 E. Railroad Ave. Plains, MT 59859 Tel: 406.826.9330

1/2" pipe

**Micron Mill Wave Table** Standard control leg mounted Price \$12,295.00 USD

**Basic Diagram of Table** 

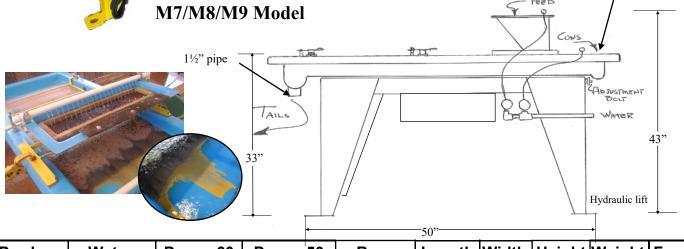

| Produc-<br>tion Rate  | Water<br>require-<br>ments   | Power 60<br>cycle<br>(M7)<br>(M9)  | Power 50<br>cycle<br>(M8)  | Base<br>foot print   | Length<br>table<br>top | Width<br>table<br>top | Height  | Weight  | Founda-<br>tion   |
|---|--|--|--|--|------------------------|-----------------------|---|---------|---|
| 600-2500 lbs wet slur- ry feed per hour depending on material run  80-99% re- covery 20 mesh - 5 microns  Separates by specific gravity | 3-8 GPM (can be recycled), 2 adjustable spray bars  Supplied with flex hoses that attach to standard ½" hose lines | enclosed motor, 1760 RPM, 110-220V 600 watts, 1.9 amps, 3 phase, IP55, temperature tolerance class F  Variable speed control 120-240V, 3.6 amps, 50/60 Hz, single phase, NEMA 4X, LED display, Adjustable acceleration/d eceleration time 0.3-20 seconds | 1/2 HP variable speed totally enclosed motor, 1760 RPM, 220V 600 watts, 1.9 amps, 3 phase, IP55, temperature tolerance class F  Variable speed control 240V, 3.6 amps, 50/60 Hz, single phase, NEMA 4X, LED display, Adjustable acceleration/de celeration time 0.3-20 seconds | Holes on center 47" x 24" for securing to concrete floor Leveling risers included for 2 legs | 61"                    | 32"                   | 43" Including feed trough with screen Working height 33" (ground to table top) Built-in hydrau- lic jack lift | 412 lbs | Ô[ } & ^ c^ Á<br>5' x 3'<br>Minimum<br>Ideally 12'<br>x 9" for<br>working<br>space<br>4" ﴿ Â ÆÁ<br>cœ Á ÆÁ<br>f €€€Á, • ã |